



NVS-IPC-01
.....

CAMERA


CE FC 

QUICK GUIDE



What's in the box

Consult the checklist below for all components.



NVS-IPC-01




Power adapter



Screw package



Manual

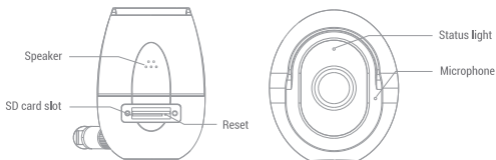

Description

Power DC12V±10%

Status light


- Red light solids on: the camera network is abnormal
- Blinking red light: awaiting WiFi connection (faster blinking)
- Blue light solids on: camera running correctly
- Blinking blue light: currently connecting (faster blinking)

Microphone Captures sound for your video

SD card Supports local SD Card storage (Max.128G)

Speaker Speaker speak with the app and it will revert too

Reset Press and hold for 5 seconds with pin to reset the camera (if you have modified settings, they will return to factory defaults)



- 1 Fix the Camera to the wall with screws
- 2 Adjust camera angle to a correct view (as shown in the picture)

Connect

Download

Tuya Smart is available for both iOS and Android OS. Search the name 'Tuya Smart' in App Store or Android Market, or scan the QR-Code to download the App.

• Support




Download App (iOS/Android)

Set up router

This device only supports 2.4GHz frequency band router, does not support 5GHz frequency band router, please set the relevant parameters of the router before WiFi configuration, WiFi passwords do not include special characters such as ~!@#\$\$%^&*(). When the device is configured in WiFi, the mobile phone and device are as close as to the router, which can speed up the configuration of the device.





Please keep
network available



Registration process

Step 1 Open the Tuya Smart App, click "Register", read the "Privacy Policy" and click "Agree".



Step 2 input a legal and valid Mobile number or Email address and click "Continue". Input Verification Code, then log in the app.

Register

Canada +1 >

Mobile number/Email

Continue

I agree with Service Agreement and Privacy Policy

Verification Code

Verification code has been sent to: admin@gmail.com, Resend (56x)


QR Code Configuration

Getting started


1. Please follow the instructions and make sure the passwords are inputed correctly.
2. One device can only be added with one App account, if the device has been added with another account already, then it can't be added to any another account again.
3. The device will be unbind from previous account after been deleted from App. Further, the device will be resetted automatically once from blue light to red light.

Process


- Step 1 Open the Tuya Smart App, click "+" or "Add Device". Then select "All" on the "Select Device Type" page.



Step 2 Select "Security Camera". Power the device on and make sure the indicator is flashing quickly or a prompt tone is heard.

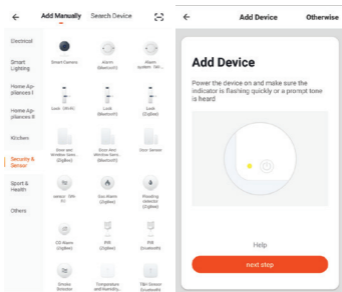


Step 3 Input WiFi passwords and click "Confirm", scan the QR Code with a device. (You can change the network connection)



About 20cm



Step 4 Click "I heard the beep" when the device comes out "dong dong dong". And you can complete the configuration about 30s.

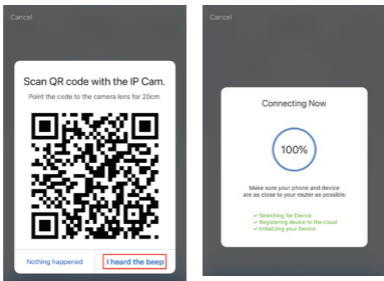

Step 5 The device is added, and the device nickname can also be changed in this interface.

Q: In the network process, the process bar is always not 100%, add failure?

A: This camera only supports 2.4GHz WiFi router, please make sure you are using a 2.4GHz WiFi router. And confirm the WiFi password again.

Q: Repeated additions are failures?

A: After adding a failure, it is recommended to restart the device or power off, and then try to add again.

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Functions

Video flip

Flip your video stream up or down for maximum flexibility.

Motion detection

Built-in motion sensors detect movement, and the camera will send you push notifications and app alerts.

Record

Support 24H continuous recording with high capacity SD Storage or Cloud Storage.

Day & Night

Never miss a moment, even in complete darkness, with powerful night-vision technology.

